

**Test Report**

Number: SZHH01180742S1

Applicant: TREELOCATE  
STATION ROAD  
BELFORD  
NE70 7DT

Date: Aug 15, 2017

Attn: Mark Nesbitt

*This is to supersede Report No. SZHH01180742 dated Aug 09, 2017*

Sample Description:

One (1) submitted sample said to be **pure plastic leaves**.  
Country of Origin : China.  
Date Sample Received : Aug 01, 2017.



\*\*\*\*\*

Tests conducted:

As requested by the applicant, refer to attached page(s) for details.

\*\*\*\*\*

Conclusion:

Test Samples	Standard	Result
Submitted sample	ASTM G154-12a - Standard Practice for Operating Fluorescent Light Apparatus for UV Exposure of Nonmetallic Materials – Cycle 7	Pass
	U.S. CFR Title 16 (CPSC Regulations)Part 1500.3(c)(6)(vi) flammability test on rigid and pliable solids	Pass

\*\*\*\*\*

Authorized by:  
For Intertek Testing Services  
Shenzhen Ltd.

Ben N.L. Lin  
General Manager



**Test Report**

Number: SZHH01180742S1

Tests Conducted

1 Fluorescent Light Apparatus for UV Exposure Test on Nonmetallic Materials

With reference to ASTM G154 – 12a: Standard Practice for Operating Fluorescent Light Apparatus for UV Exposure of Nonmetallic Materials – Cycle 7.

Operating conditions:

- (1) Lamp = UVA-340.
- (2) Typical irradiance = 1.55W/ (m<sup>2</sup>.nm).
- (3) Approximate wavelength = 340nm.
- (4) Exposure cycle = 8 h UV at 60(±3)°C black panel temperature; 0.25 h water spray (no light), temperature not controlled; 3.75 h condensation at 50(±3)°C black panel temperature.
- (5) Exposure period = six (6) cycles (Total 72 hours).

Equipment: QUV chamber (model number: QUV/spray)

Number of specimen: Two (2) pieces per part; Total Two (2) parts

Assessment method:

Color change was assessed with reference to ISO 105-A02:1993 (grey scale).


Test result:

Tested sample	Grade of colorfastness
Part 1	4.5
Part 2	4.5

Note: The grey scale was determined under the D65 standard light, the grade 5 is the best and the grade 1 is the worst.

Client's requirement : Grade 4.0 or above.

**Photo of specimen for reference**

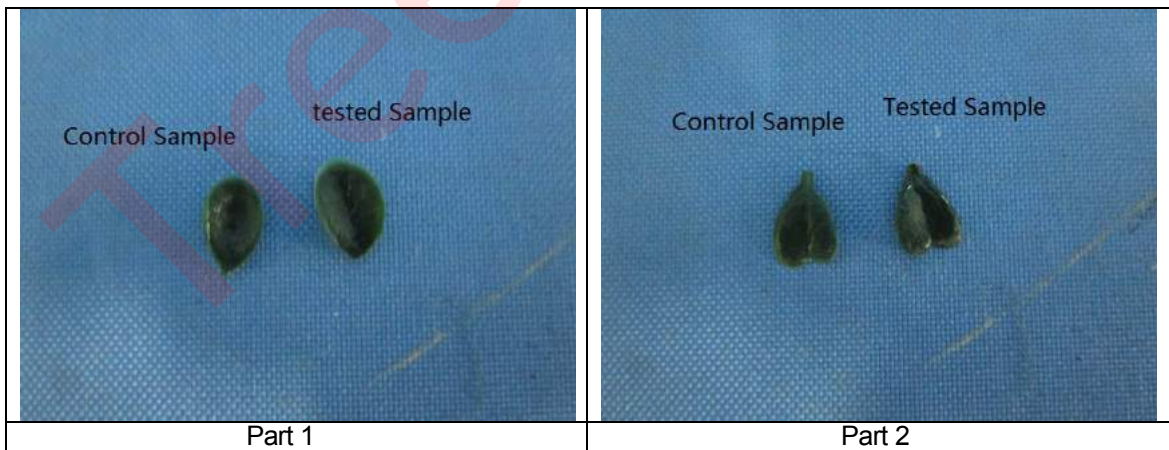

\*\*\*\*\*



**Test Report**

Number: SZHH01180742S1

Tests Conducted

2 Flammability Test

As per U.S. Code of Federal Regulations Title 16 Part 1500.44 for rigid and pliable solids.

Result: Ignited but self-extinguished before burn rate could be determined.

\*\*\*\*\*  
End of report

*This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek Testing Services Shenzhen Ltd.*

Treelocal



To: TREELOCATE

Attention: Mark Nesbitt

Date: Aug 15, 2017

---


Re : Report Revision Notification

Intertek Testing Services Report Number SZHH01180742 Dated Aug 09, 2017.

Please be informed that all the content recorded in the above captioned report will be void. This captioned report is now superseded by a revised Intertek Testing Services Report SZHH01180742S1,

Thank you for your attention.

Authorized by:  
For Intertek Testing Services  
Shenzhen Ltd.

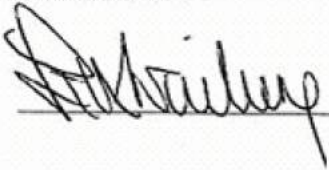

Ben N.L. Lin  
General Manager

